

## Variable dimensions:

### **B: Flange/adapter:**

Tri-Clamp adapters are compatible with all standards (ISO/DIN/ASME)

Standard Tri-Clamp is D=50.5mm [1.5"]



Other options:

D=64mm

D=77.5mm

D=91mm

D=106mm

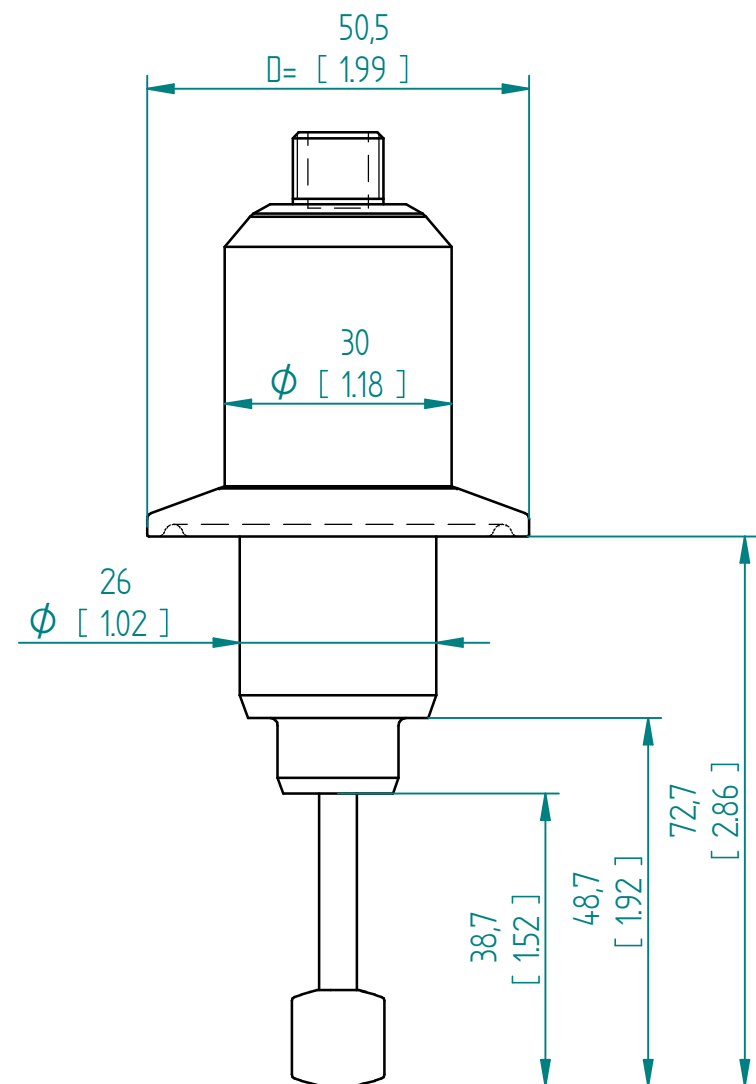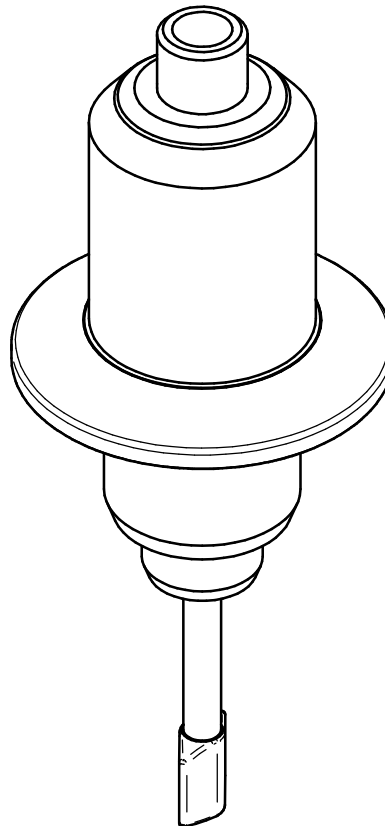

Units: mm  
[inch]

## SRD Tri-Clamp

This drawing remains property of rheonics. It may be neither copied nor informed to third persons or competitors without our approval. ( 2 paragraph 1 fig.7 copyright act of 9th Sept. 1965)

rheonics



inline process  
density and viscosity  
monitoring

Protected by US and International patents granted and pending

rheonics • Switzerland • USA • [www.rheonics.com](http://www.rheonics.com) • [info@rheonics.com](mailto:info@rheonics.com) +41 52 511 32 00 +1 713 364 5427