
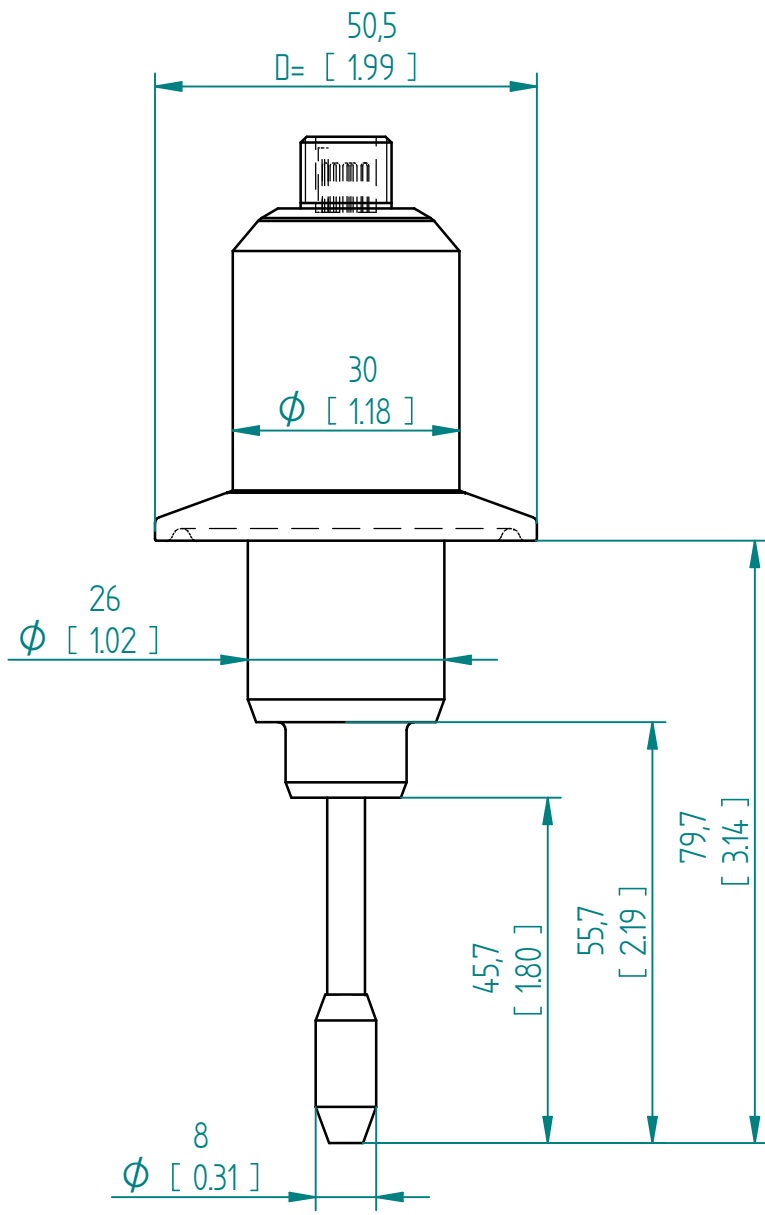


Variable dimensions:

B: Flange/adapter:

Tri-Clamp adapters are compatible with all standardss (ISO/DIN/ASME)
Standard Tri-Clamp is D=50.5mm [1.5"]
Other options:
D=64mm
D=77.5mm
D=91mm
D=106mm

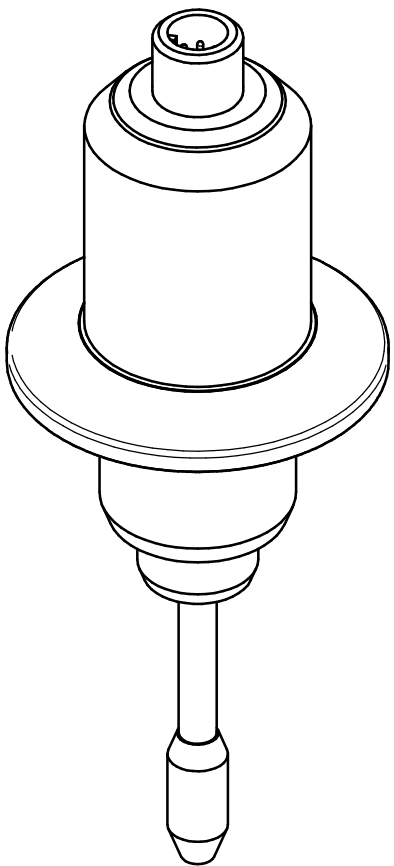

Units: mm
[inch]

SRV Tri-Clamp

This drawing remains property of rheonics. It may be neither copied nor informed to third persons or competitors without our approval. (2 paragraph 1 fig.7 copyright act of 9th Sept. 1965)

Protected by US and International patents granted and pending

rheonics • Switzerland • USA • www.rheonics.com • info@rheonics.com +41 52 511 32 00 +1 713 364 5427



rheonics

inline process
density and viscosity
monitoring