


SRV-HD-X5-Axxx-B1N25 (P)				
X5	Installation			
Α	Insertion Depth	Custom		
В	Connection	Thread		
	Туре	NPT 1.25''-11.5		

Custom Flange (F)		
Connection	Flange	
Norm		
Size		
Pressure Rating		
Threaded hole	1.25" NPT	
Who provides	Rheonics	
	Customer	

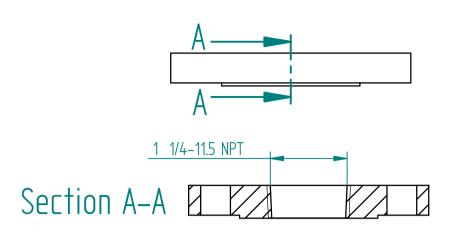

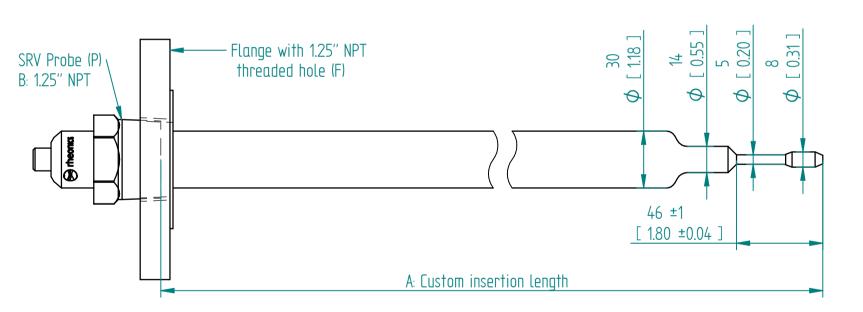



Units: mm [inch]

SRV-HD-X5-Axxx-B1N25 Threaded Flange


This drawing remains property of rheonics. It may be neither copied nor informed to third persons or competitors without our approval. (2 paragraph 1 fig.7 copyright act of 9th Sept. 1965)

inline process density and viscosity monitoring


rheonics

Flange can be 1.5" or bigger. Care should be taken during assembly to not hit the sensing element

hould be taken during assembly to not hit the sensing element.		Install	Lation
	Α	Insertion Depth	Custor
	D	Connection	Threa
	D	Туре	NPT 1.
Recommended Recommended			

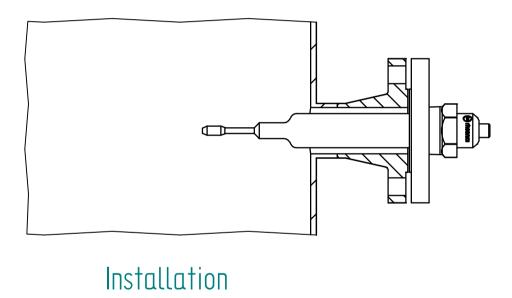

in tank

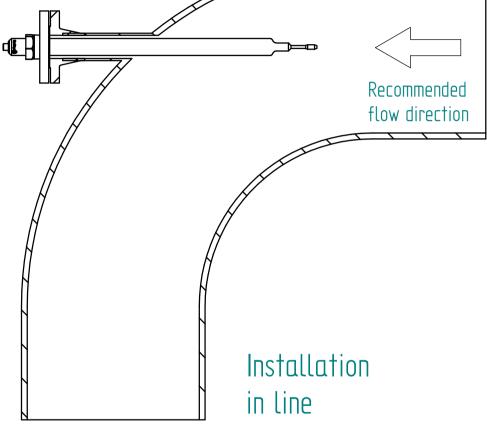

Units: [inch]

SRV-HD-X5-Axxx-B1N25 Threaded Flange

This drawing remains property of rheonics. It may be neither copied nor informed to third persons or competitors without our approval. (2 paragraph 1 fig.7 copyright act of 9th Sept. 1965)

rheonics inline process density and viscosity

monitoring

SRV-HD-X5-Axxx-B1N25 (P)

Custom

Thread

NPT 1.25"-11.5

Protected by US and International patents granted and pending