

Rheonics SRV Inline Viscometer Material 316L Process Connection Varinline N Machined SRV-X4-VNM Order Code

Varinline N Flange/Plug is machined with a cut to mantain minimum area around the sensing element

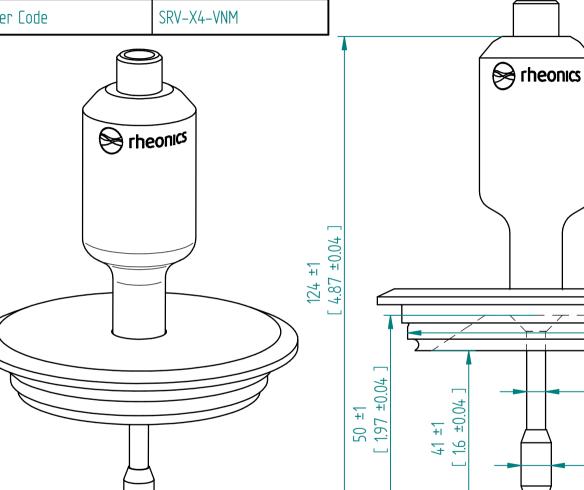

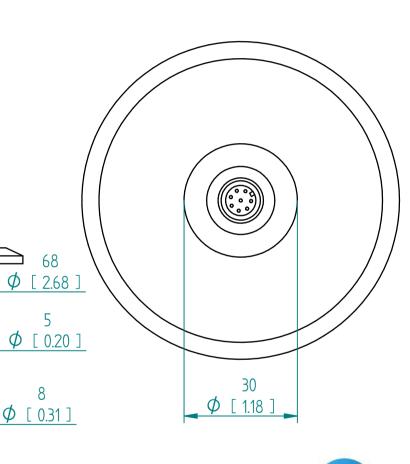

8

## SRV-X4-VNM Varinline N Machined

 $\mathbb{M}$ 

[inch]

Units:

This drawing remains property of rheonics. It may be neither copied nor informed to third persons or competitors without our approval. (2 paragraph 1 fig.7 copyright act of 9th Sept. 1965)

inline process density and viscosity monitoring

rheonics

		V : 1: MEL (DL : 1: 1		I	Γ
Rheonics SRV Inline Viscometer		Varinline N Flange/Plug is machined with a cut to mantain minimum area		Name	Varinline Housing DN40
Material	316L	around the sensing element		GEA Code	Varinline TDN40
Process Connection	Varinline N Machined			Rheonics Code	IFC-V40
Order Code	SRV-X4-VNM			Inlet/Outlet	Welding Ports
				Name	Varinline N Machined Blind Plug
	rheonics SRV-X4-VNM Varinline N Machined		2	Code	PLG-VNM
6 50 ±1 [ 1.97 ±0.04 ]		1 Varintine Housing DN  8			neonics
SRV-X4-VNM		le for the correctness of the third party drawings. Dimensions are adapted from publically available di heck and confirm that the retrofit sensor has the dimensions and flange specifications for a correct in		s. on	IEOITIC3

## SRV-X4-VNM Varinline Housing DN40

No warranty is made for the correctness of the third party drawings. Dimensions are adapted from publically available drawings. Customer should check and confirm that the retrofit sensor has the dimensions and flange specifications for a correct installation

This drawing remains property of rheonics. It may be neither copied nor informed to third persons or competitors without our approval. ( 2 paragraph 1 fig.7 copyright act of 9th Sept. 1965)

Protected by US and International patents granted and pending

inline process density and viscosity

monitoring