


| | |
|-----------------|--------------------|
| Pressure rating | 200 bar (2900 psi) |
| Material | 316L |
| Fluid volume | 69.5 ml |

Only to be used with correct pressure rating on the SRV sensor and process connection.

SRV with 1.5" TriClamp (DN40)
Process Connection

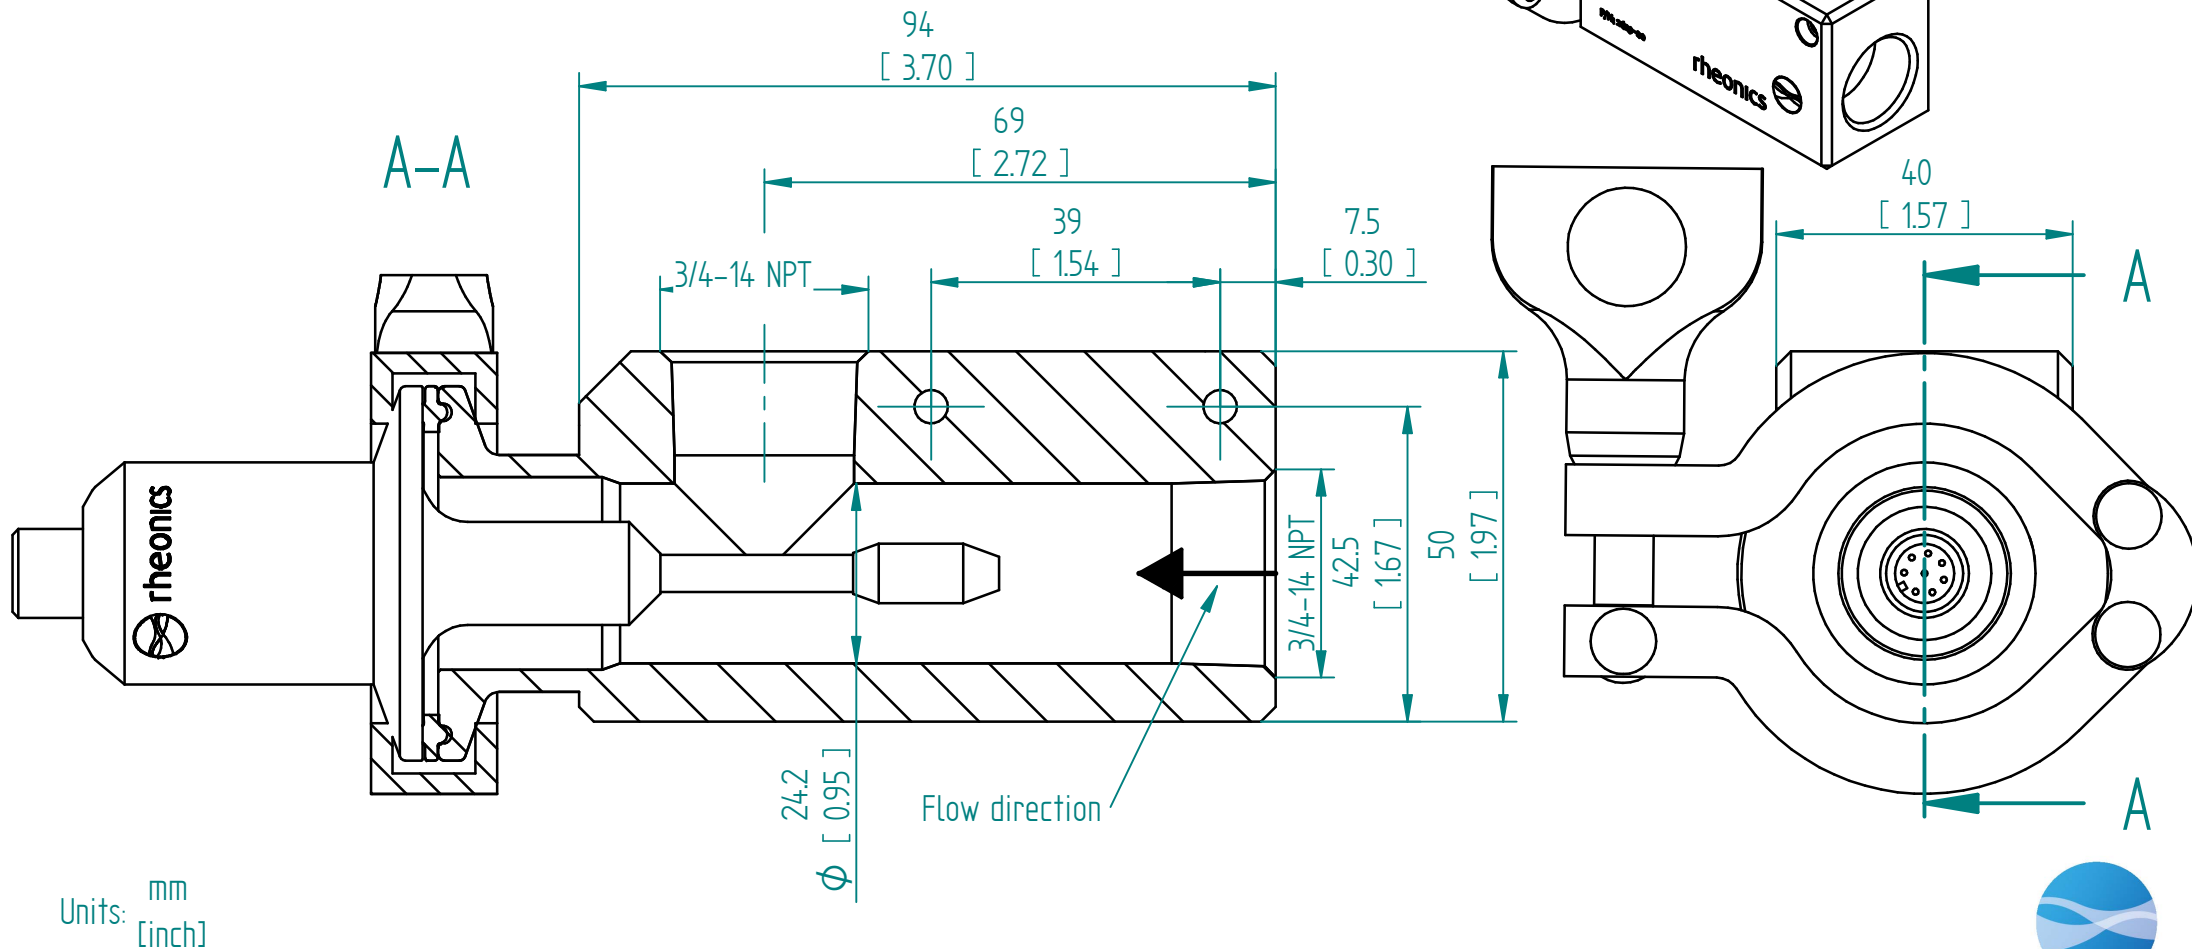

SRV-HD 1.5" Tri-Clamp IFC-15T-34N-SRV

This drawing remains property of rheonics. It may be neither copied nor informed to third persons or competitors without our approval. (2 paragraph 1 fig.7 copyright act of 9th Sept. 1965)

rheonics

inline process
density and viscosity
monitoring

Protected by US and International patents granted and pending


rheonics • Switzerland • USA • www.rheonics.com • info@rheonics.com +41 52 511 32 00 +1 713 364 5427

Release: 2503

For mounting use

- 8-32 x 1 3/4 in. screws or with
- M4 x 45 mm screws

For better cleanability,
mount adapter at an angle
as shown in the image to the right

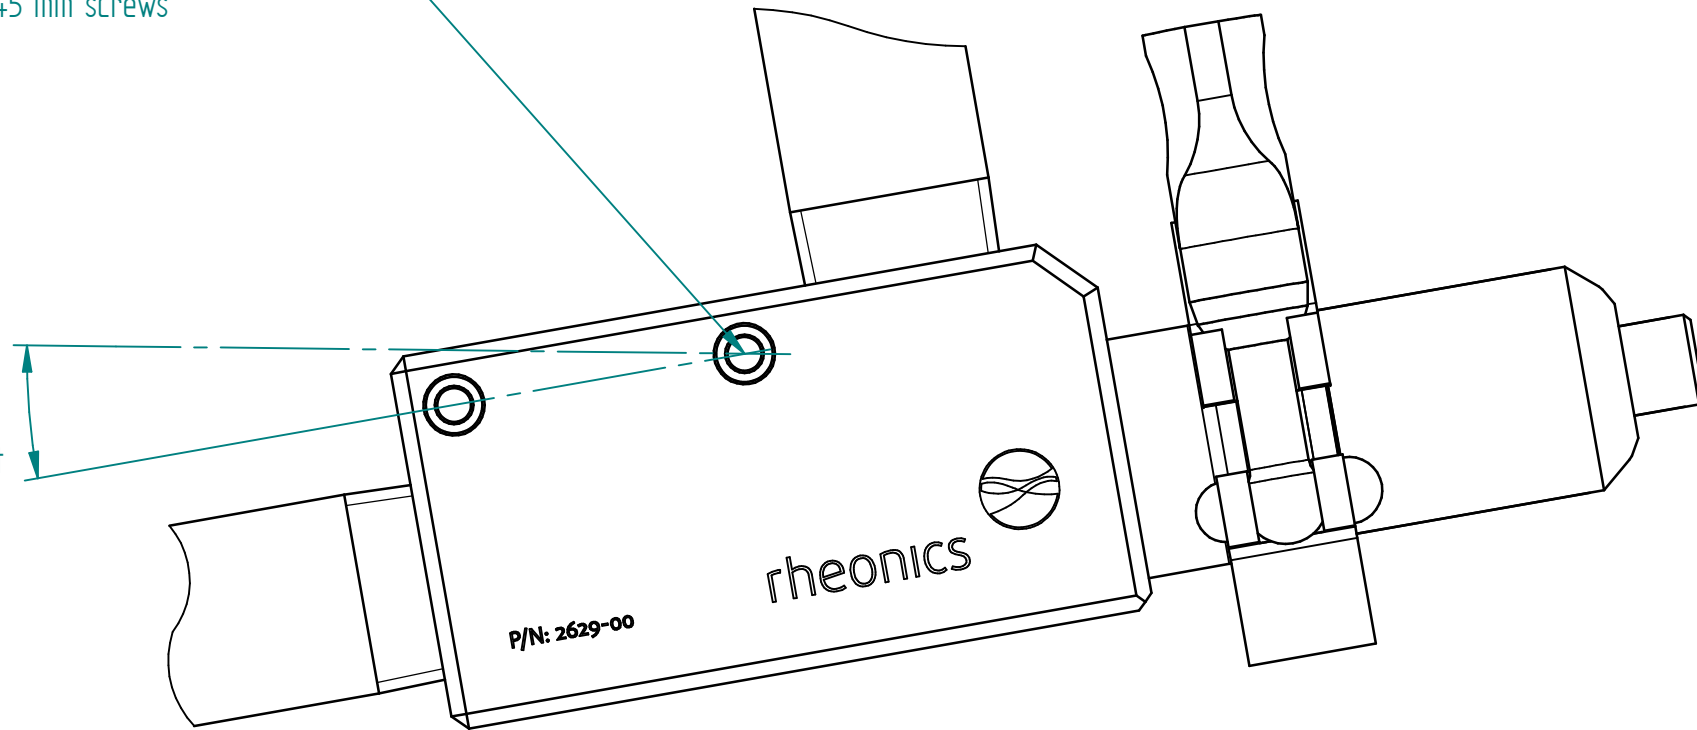

Units: mm
[inch]

SRV-HD 1.5" Tri-Clamp IFC-15T-34N-SRV

This drawing remains property of rheonics. It may be neither copied nor informed to third persons or competitors without our approval. (2 paragraph 1 fig.7 copyright act of 9th Sept. 1965)

Protected by US and International patents granted and pending

rheonics • Switzerland • USA • www.rheonics.com • info@rheonics.com +41 52 511 32 00 +1 713 364 5427

Release: 2503

rheonics



inline process
density and viscosity
monitoring