




Fluid connection adapters:
 Gland 9/16"-18 UNF
 Collar 1/4"-28-LH UNF
 Tube [Nipple] (OD 1/4" - ID 1/8")

Module Material	Titanium Grade 5
Module IP Rating	IP 69K

Available Pressure rating	Available Temperature rating
P1: 700 bar (10,000 psi)	T1: 125 °C (250°F)
P2: 1000 bar (15,000 psi)	T2: 150 °C (300°F)
P3: 1400 bar (20,000 psi)	T3: 175 °C (350°F)
P4: 2100 bar (30,000 psi)	T4: 200 °C (400°F)
Px: As specified	Tx: As specified

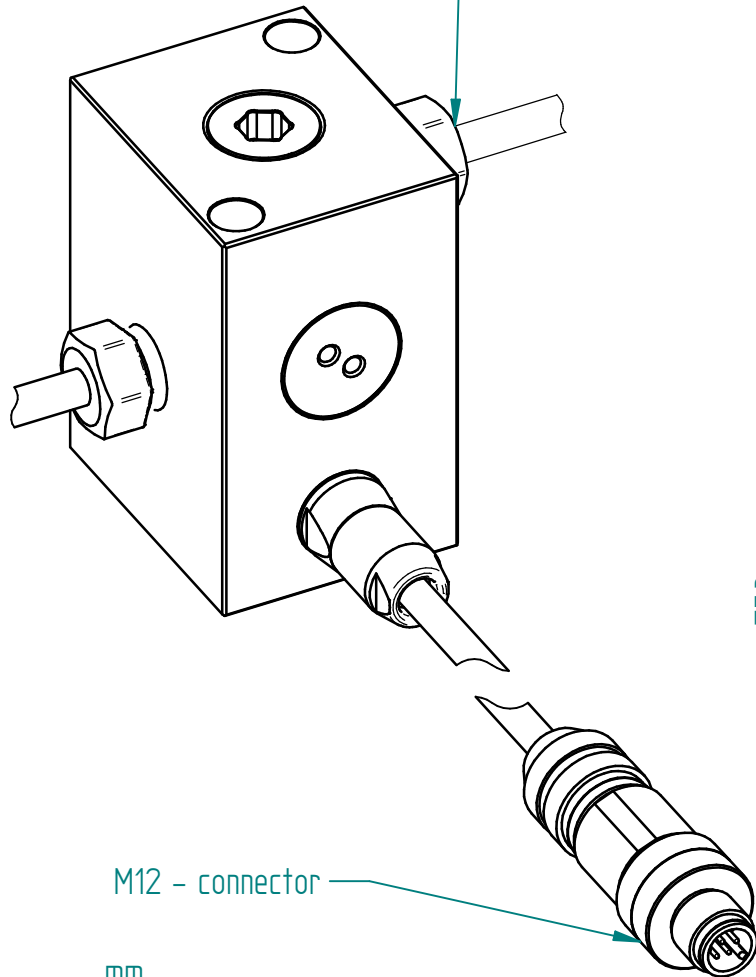

Units: $\frac{\text{mm}}{[\text{inch}]}$

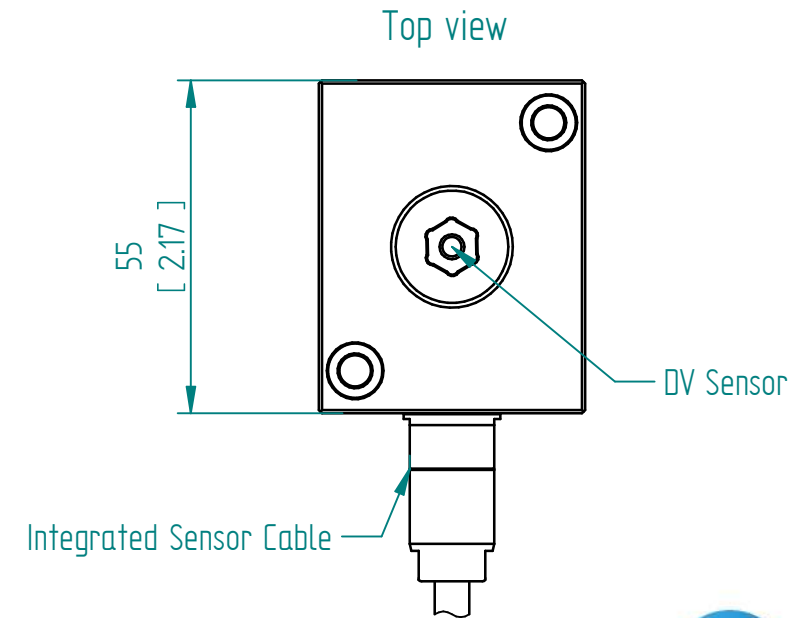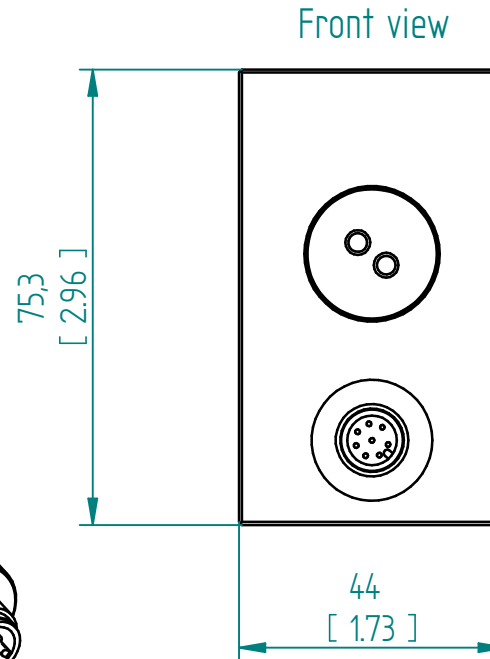

Rheonics DVM HPHT

This drawing remains property of rheonics. It may be neither copied nor informed to third persons or competitors without our approval. (2 § paragraph 1 fig.7 copyright act of 9th Sept. 1965)

Protected by US and International patents granted and pending

rheonics • Switzerland • USA • www.rheonics.com • info@rheonics.com +41 52 511 32 00 +1 713 364 5427

Release: 2504


rheonics

inline process
density and viscosity
monitoring



Nr	Part number	Description
1	HP-CL-14FLH	Collar 1/4"-28-LH UNF
2	HP-GL-916F	Gland 9/16"-18 UNF
3	HP-TB-14FLH	Tube [Nipple] (OD 1/4" - ID 1/8")

*Connection adapters included upon request

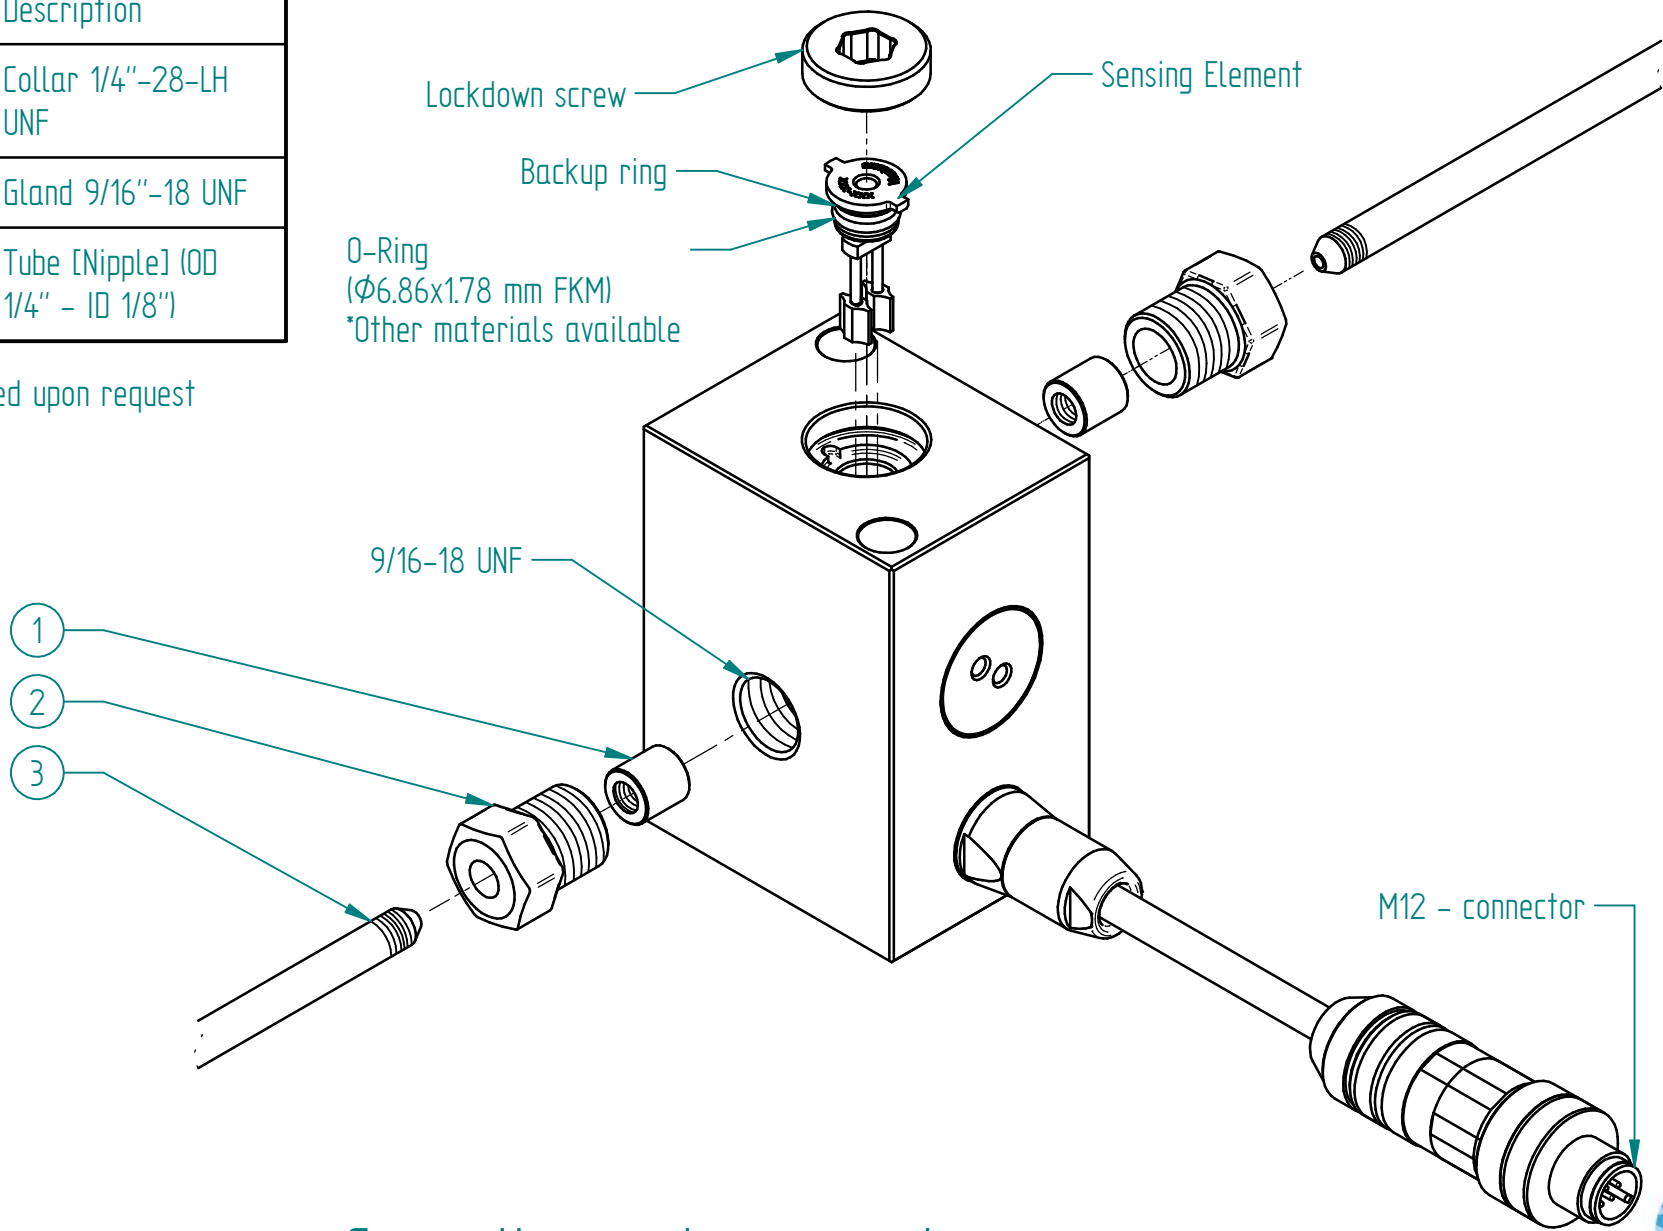

Connections and components